


uRent

Indoor LED Panel Display

2.6p | 2.9p

RELOOK

Integrated Display Solutions

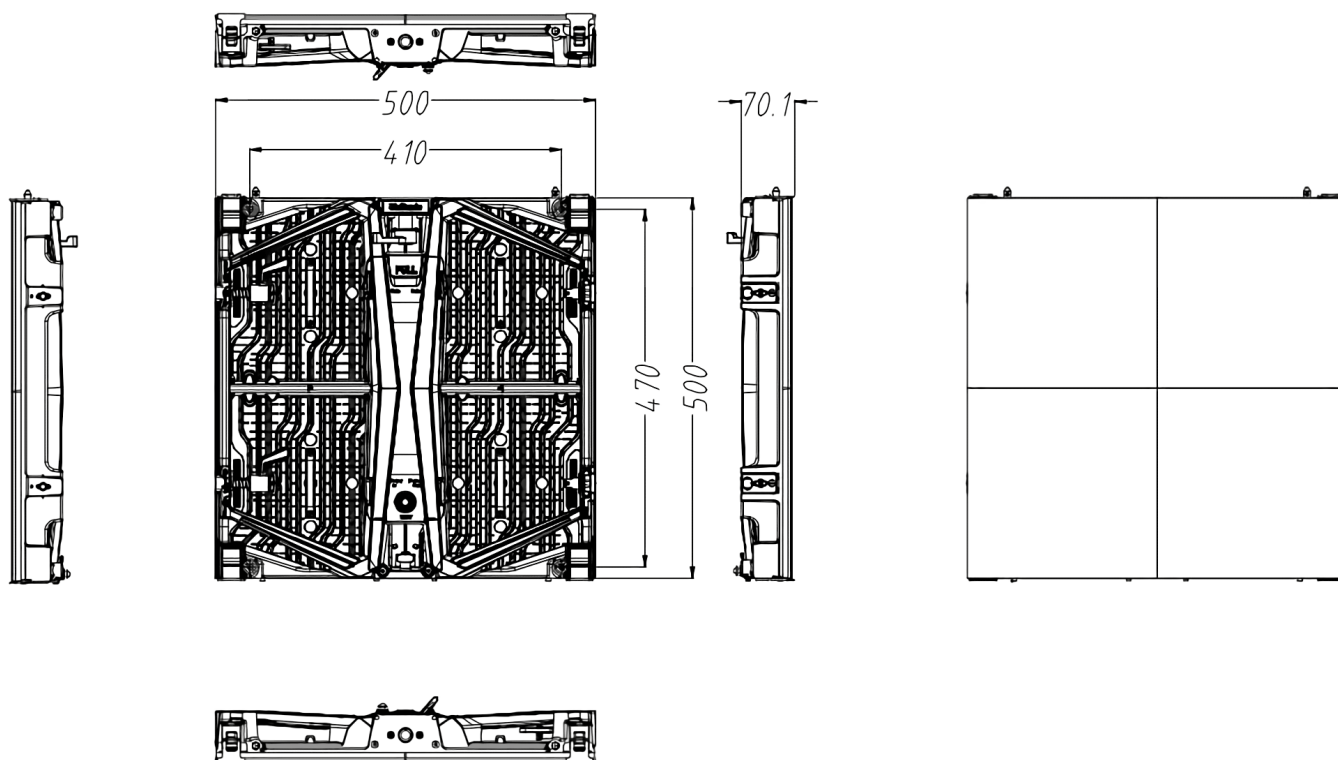

16 RUE MILLEWEE L-7257 HELMSANGE WALFERDANGE, LUXEMBOURG



TEL +352 26 43 22 03



FAX +352 26 43 22 04



CONTACT@RELOOK.LU



WWW.RELOOK.LU

RELOOK

Integrated Display Solutions

PIXEL PITCH	2.6 mm	2.9 mm
LED TYPE	3-in-1 Black SMD	3-in-1 Black SMD
LED CONFIGURATION	1Red, 1Green, 1Blue	1Red, 1Green, 1Blue
BRIGHTNESS	1000 cd/m²	800 cd/m²
PIXEL DENSITY	147,456 pixels/m²	112,896 pixels/m² (168 * 168pixels / panel)
MODULE SIZE	250 mm * 250 mm	250 mm * 250 mm
CABINET SIZE	500 mm * 500 mm * 70.1 mm	500 mm * 500 mm * 70.1 mm
ASPECT RATIO	1:1	1:1
PIXELS PER PANEL	192×192 Dots	192×192 Dots
AREA	0.25 m²	0.25 m²
WEIGHT	6.3 kg/panel	6.3 kg/panel
RECOMMENDED VIEWING DISTANCE	≥ 2.6 m	≥ 2.9 m
MATERIAL	Die-cast Magnesium	Die-cast Magnesium
ENVIRONMENT	Indoor	Indoor
INGRESS PROTECTION	IP30	IP30
OPERATING TEMPERATURE/HUMIDITY	-10°C ~ +45°C / 10 ~ 80% RH	-10°C ~ +45°C / 10 ~ 80% RH
STORAGE TEMPERATURE/HUMIDITY	-20°C ~ +50°C / 10 ~ 80% RH	-20°C ~ +50°C / 10 ~ 80% RH
MAINTENANCE	Rear	Rear
CURVE	-5° (Convex) ~ +10° (Concave)	-5° (Convex) ~ +10° (Concave)
GAP BETWEEN MODULES	Seamless	Seamless
PLANENESS	< 0.25 mm	< 0.25 mm
HORIZONTAL VIEWING ANGLE	140°	140°
VERTICAL VIEWING ANGLE	120°	120°
COLOR TEMPERATURE	2000K - 9300K Adjustable	2000K - 9300K Adjustable
COLORS	4.4 Trillion	4.4 Trillion
BRIGHTNESS CONTROL	Manual / Automatic	Manual / Automatic
CONTRAST RATIO	3000 : 1	3000 : 1
MAXIMUM INPUT POWER	120W /panel	120W /panel
TYPICAL INPUT POWER	40W /panel	40W /panel
DRIVING METHOD	1/16 Duty Constant Current Drive	1/16 Duty Constant Current Drive
VIDEO FRAME RATE	50/60 Hz	50/60 Hz
REFRESH RATE	3840 Hz	3840 Hz
INPUT VOLTAGE	100 ~ 240VAC	100 ~ 240VAC
INPUT POWER FREQUENCY	50 ~ 60 Hz	50 ~ 60 Hz
PROCESSING DEPTH	DVI / HDMI / VGA / SDI / DP / AV / S-Video, etc	DVI / HDMI / VGA / SDI / DP / AV / S-Video, etc
SCAN METHOD	-	13 bit
INPUT SIGNAL	-	1/28
CALIBRATION	Support Brightness and Chroma	Support Brightness and Chroma
ACOUSTIC NOISE	Fanless Operation	Fanless Operation
LED LIFETIME	≥ 100,000 Hours	≥ 100,000 Hours
LED WAVELENGTH	R:620~630nm G:520~535nm B:465~475nm	R:620~630nm G:520~535nm B:465~475nm
STANDARD MOUNTING CONFIGURATION	Hanged, Floor-mounted	Hanged, Floor-mounted
PROFESSIONAL SERVICES	Design, Configuration, Install and Service	Design, Configuration, Install and Service
POWER STATUS	Diagnostic LEDs	Diagnostic LEDs
CERTIFICATION	TUV-CE/UL/CB/FCC/IC/ROHS	TUV-CE/UL/CB/FCC/IC/ROHS
DATA INTERCONNECTION	CAT5 Cable (L≤100m); Multi-mode Fiber (L≤300m); Single Mode Fiber (L≤15Km)	CAT5 Cable (L≤100m); Multi-mode Fiber (L≤300m); Single Mode Fiber (L≤15Km)

